

# CHAPTER 8:

## Conservation of Energy



# How We Got Here!

*We started* by noticing that a *force component* acted along the line of a body's motion will affect the magnitude of the body's velocity. We multiplied the *force component and displacement* to generate the scalar quantity called *work*.

*Using Newton's Second*, we derived a relationship between the *net work* done on a body and the *change of* the body's *kinetic energy*. This was called the *work/energy theorem*.

*We then* noticed that *there are forces whose work done* does *not depend upon the path taken* as a body travels between two points—*whose work is end-point independent* (friction was clearly not one of these forces). In such cases, we developed the idea of a function that, when evaluated at the endpoints, would allow us to determine how much work the field did as a body moved between the points . . . which is to say, we *developed* the idea of *potential energy functions*.

*So now it's time* to take the last step, starting with *the work/energy theorem*.

*Consider* a body moving through a group of force fields on its way from *Point 1* to *Point 2*. What does the **work/energy theorem** tell us about the body's motion?

*The net work done* will equal the **sum of all the bits of work** done by the various pieces of force acting on the system. **Denoting each force with a letter**, this can be written as:

$$W_{\text{net}} = \Delta \text{KE}$$
$$W_A + W_B + W_C + W_D + W_E = \text{KE}_2 - \text{KE}_1$$

*Assume:*

- the forces that produce *work A* and *work B* are **conservative** with **KNOWN potential energy functions**.
- the force that produces *work C* is **conservative** but with an **UNKNOWN potential energy function**.
- the forces that produce *work D* and *work E* are **non-conservative**, don't **HAVE potential energy functions** and need to be determined using either  $\vec{F} \cdot \vec{d}$  or  $\int \vec{F} \cdot d\vec{r}$ .

*For work A and work B*, we have potential energy functions. So . . .

$$\begin{aligned} W_A &= -\Delta U_A & \text{and} & & W_B &= -\Delta U_B \\ &= -(U_{2,A} - U_{1,A}) & & & &= -(U_{2,B} - U_{1,B}) \end{aligned}$$

*For work C, D and E*, we can't use potential energy functions, either because we don't know them or because they are non-conservative forces and don't *have* them.

With this, the *work/energy theorem becomes*:

$$\begin{aligned} W_A + W_B + W_C + W_D + W_E &= KE_2 - KE_1 \\ \left[ -(U_{A,2} - U_{A,1}) \right] + \left[ -(U_{B,2} - U_{B,1}) \right] + \vec{F}_C \cdot \vec{d} + \vec{F}_D \cdot \vec{d} + \int \vec{F}_E \cdot d\vec{r} &= KE_2 - KE_1 \\ \left[ -(U_{A,2} - U_{A,1}) \right] + \left[ -(U_{B,2} - U_{B,1}) \right] + \sum W_{\text{extraneous}} &= KE_2 - KE_1 \end{aligned}$$



*Rewriting* this so the signs are easy to see, we get . . .

$$\begin{aligned} & \left[ -\left( U_{A,2} - U_{A,1} \right) \right] + \left[ -\left( U_{B,2} - U_{B,1} \right) \right] + \sum W_{\text{extraneous}} = KE_2 - KE_1 \\ & -U_{A,2} + U_{A,1} \quad -U_{B,2} + U_{B,1} + \sum W_{\text{extraneous}} = KE_2 - KE_1 \end{aligned}$$

*What we are left with* are a *bunch of potential energy terms* (U terms) and at least *one kinetic energy term* evaluated at time  $t_1$ , and a similar group of terms evaluated at time  $t_2$ . If we put all of the terms associated with the state of the system at the beginning of the time interval, at *point in time 1*, on the *left side of the equal sign*, and put all of the terms associated with the state of the system at the end of the time interval, at *point in time 2*, on the *right side of the equal sign* (*leaving the extraneous work terms alone*), we get:

$$KE_1 + U_{1,A} + U_{1,B} + \sum W_{\text{extraneous}} = KE_2 + U_{2,A} + U_{2,B}$$

*Rewriting this* in it's most succinct form, allowing for the possibility that you could have more than one object with *kinetic energy* in a system at a given instant (think Atwood Machine), we get:

$$\sum \text{KE}_1 + \sum U_1 + \sum W_{\text{extraneous}} = \sum \text{KE}_2 + \sum U_2$$

If we call the **sum of all the kinetic energies** *and* all of the **potential energies at a point in time** the *mechanical energy E at that time*, we can make this relationship even more abbreviated as:

$$E_1 + \sum W_{\text{extraneous}} = E_2$$

This is the absolute simplest form of this relationship.

*In summary*, this relationship states that **if** there is **no work being done by extraneous forces in a system** (remember, a force that does extraneous work is one whose work calculation can't be done using a *potential energy function*), **then the total mechanical energy at time 1 will equal the total mechanical energy at time 2**. In other words, the **total mechanical energy** does not change, **is conserved** and

$$E_1 + \cancel{\sum}^0 W_{\text{extraneous}} = E_2$$
$$\left( \sum KE_1 + \sum U_1 \right) = \left( \sum KE_2 + \sum U_2 \right)$$


*Note 1:* At *time 1*, the **distribution of potential and kinetic energies may be different than at time 2**. The claim is that the **SUM** of those two types of energy will **always be equal**.

*Note 2:* How to conceptually understand this? If there is *extraneous work* being done, that will simply **increase** or **decrease** the **initial mechanical energy** in the system giving us the **final mechanical energy** in the system.

# Using Conservation of Energy

*Several gentle* starter **Problems #1** (you will look back at these with fondness): A ball of mass  $m$  is thrown from a height  $h$  with an initial velocity upward of  $v_0$ . If it loses 10 joules of energy to friction on the way, how fast is it moving when it reaches the ground? What is its velocity at an arbitrary height  $y$  if it has lost 6 joules of energy to friction by that point?

*Because there is* no preferred  $F = 0$  point for gravity near the surface of the earth, hence no preferred  $U = 0$  point, it is always *your choice* as to where you will place the *zero potential energy level* when doing problems like this. In the case of the ball, the *most reasonable choice* is to take the *ground* as the  $y = 0$  level.

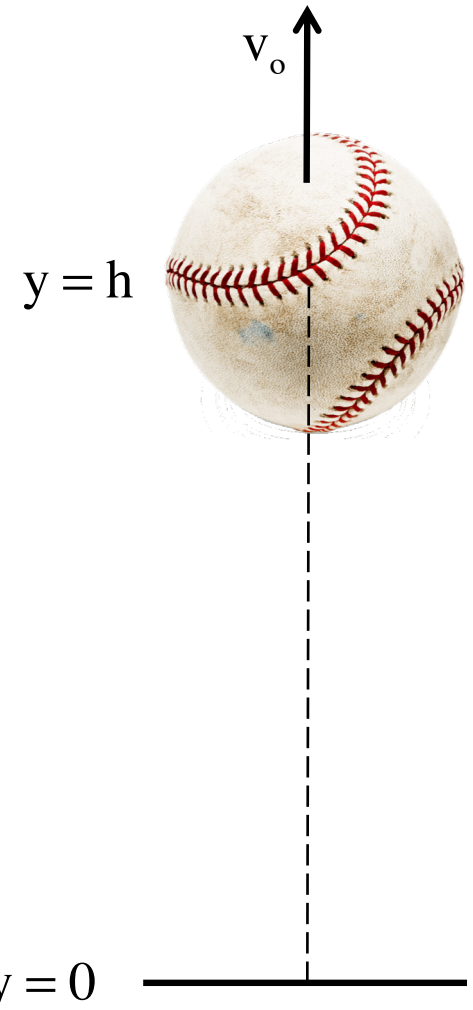

*With all* that in mind, this is a typical *conservation of energy problem*. Starting with the standard form, we can simply filling in the bailiwicks . . .

$$\sum KE_1 + \sum U_1 + \sum W_{\text{ext}} = \sum KE_2 + \sum U_2$$

--*at the beginning* of the interval, **is anything moving?** If so, write  $\frac{1}{2}m(v_1)^2$  for it. If not, write 0. **There is** movement in this case, so we write:


$$\sum KE_1 + \sum U_1 + \sum W_{\text{ext}} = \sum KE_2 + \sum U_2$$

$$\frac{1}{2}m(v_o)^2$$

--*at the beginning* of the interval, is there any potential energy in the system? If so, write  $mgy_1$  or  $\frac{1}{2}k(x_1)^2$  or  $-\frac{G(m_1)(m_2)}{r}$  or whatever the function is, evaluated where the body is at the beginning of the interval. If not, write 0. There is gravity close to the earth's surface, so we write:

$$\sum KE_1 + \sum U_1 + \sum W_{\text{ext}} = \sum KE_2 + \sum U_2$$

$$\frac{1}{2}m(v_o)^2 + mgh$$

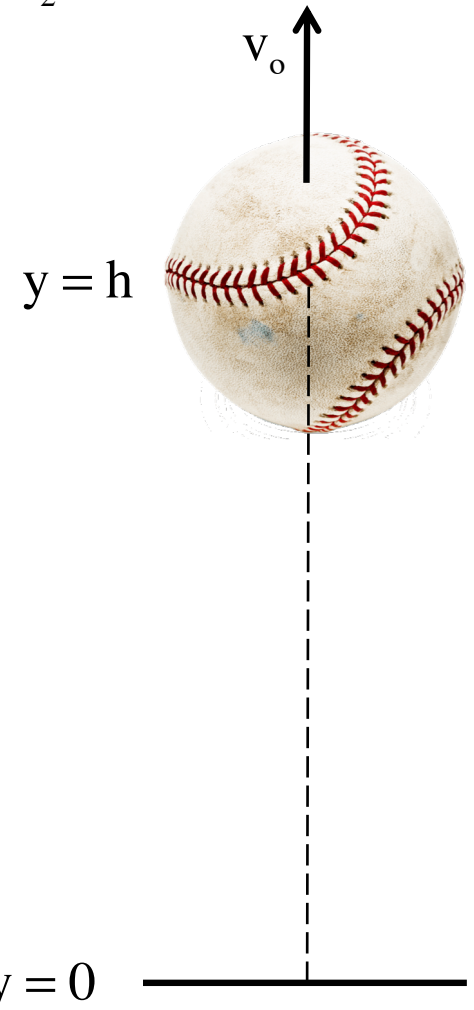

--if there is any work being done *during the interval* by forces not being taken care of by *potential energy functions*, write out those extraneous work quantities using  $\vec{F} \cdot \vec{d}$  or  $\int \vec{F} \cdot d\vec{r}$  or, if an amount is given, that amount. If not, write 0. In this case, you know you lose 10 joules, so we write:

$$\sum KE_1 + \sum U_1 + \sum W_{\text{ext}} = \sum KE_2 + \sum U_2$$


$$\frac{1}{2}m(v_o)^2 + mgh + (-10 \text{ J})$$

--*at the end* of the interval, is anything moving? If so, write  $\frac{1}{2}m(v_2)^2$  for it. If not, write 0 . . . etc., then solve.

$$\sum KE_1 + \sum U_1 + \sum W_{\text{ext}} = \sum KE_2 + \sum U_2$$


$$\frac{1}{2}m(v_o)^2 + mgh + (-10) = \frac{1}{2}m(v_{\text{bot}})^2 + 0$$

$$\Rightarrow v_{\text{bot}} = \left[ (v_o)^2 + 2gh - 2\left(\frac{10}{m}\right) \right]^{1/2}$$

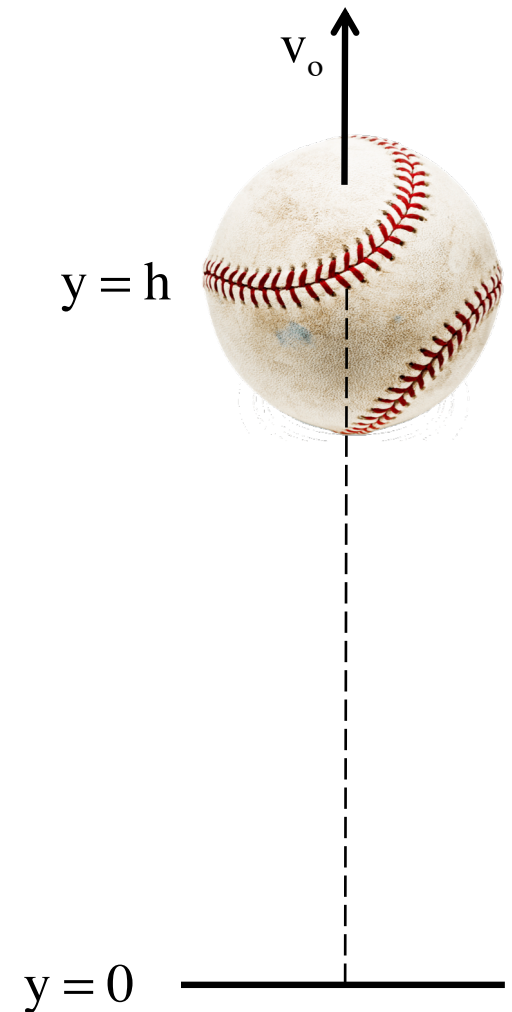

--How about the **velocity at arbitrary position  $y$** ,  
assuming 6 joules of energy was lost in the motion:

$$\begin{aligned}\sum KE_1 + \sum U_1 + \sum W_{\text{ext}} &= \sum KE_2 + \sum U_2 \\ \frac{1}{2}m(v_o)^2 + mgh + (-6 \text{ J}) &= \frac{1}{2}m(v_y)^2 + mgy \\ \Rightarrow v_y &= \left[ (v_o)^2 + 2g(h-y) - 2\left(\frac{6}{m}\right) \right]^{1/2}\end{aligned}$$

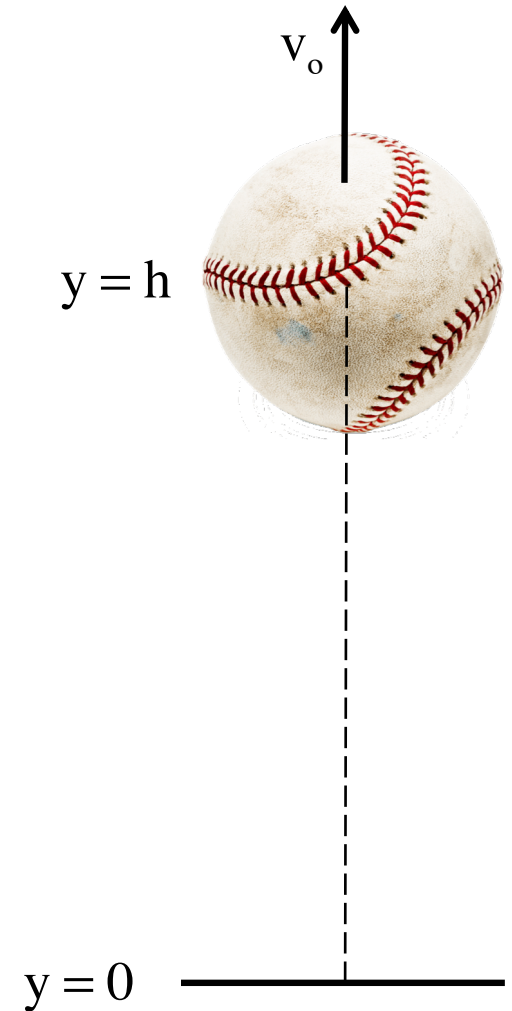




*Gentle starter #2:* A spring gun with barrel length  $d = .20$  meters (a Butline Special) and unknown spring constant  $k$  compresses its spring the full .2 meters when “cocked.” When fired, the 35 grams projectile will travel  $h=10.0$  meters above the barrel’s end.

a.) *Neglecting friction*, determine the spring constant.

The only thing that is tricky about this problem is **deciding where** you want to place the  $y = 0$  level for gravitational potential energy (you need a coordinate axis for “ $mg y$ ” to make any sense. I’m going to place it where the projectile resides when the gun is cocked. With that, conservation of energy becomes:

$$\begin{aligned} \sum KE_1 + \sum U_1 + \sum W_{\text{ext}} &= \sum KE_2 + \sum U_2 \\ 0 + \frac{1}{2}kd^2 + 0 &= 0 + mg(h+d) \\ \Rightarrow k &= \frac{2mg}{d^2}(h+d) = \frac{2(.035 \text{ kg})(9.8 \text{ m/s}^2)}{(.2)^2}(10+.2) \\ &\Rightarrow \mathbf{k = 175 \text{ N/m}} \end{aligned}$$

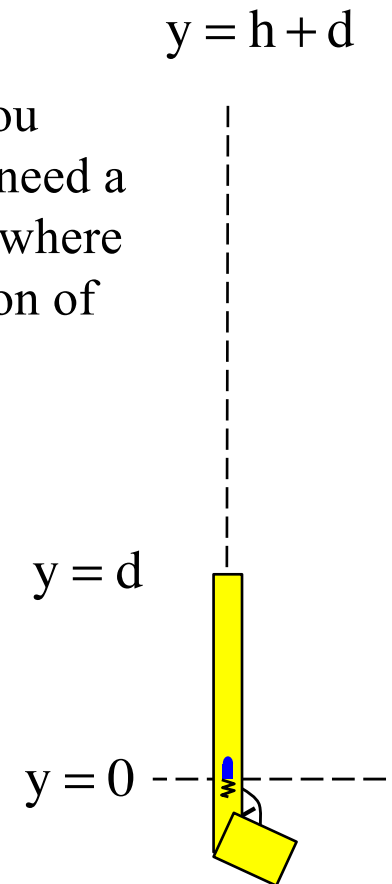

b.) *What is the equilibrium position of the spring when the projectile rests on it?*

At equilibrium, the spring force will exactly counteract gravity, so:

$$k\Delta y = mg$$

$$\Rightarrow \Delta y = \frac{mg}{k} = \frac{(.035 \text{ kg})(9.8 \text{ m/s}^2)}{(175 \text{ N/m})}$$

$$\Rightarrow \Delta y = .00196 \text{ m}$$

$$\Rightarrow y_{\text{equil}} = d - \Delta y = .20 - .00196 \text{ m} \\ = .198 \text{ m}$$

c.) *Determine the projectile velocity as it moves through the equilibrium position.* Back to conservation of energy:


$$\sum KE_1 + \sum U_1 + \sum W_{\text{ext}} = \sum KE_2 + \sum U_2$$

$$0 + \frac{1}{2}k(d)^2 + 0 = \frac{1}{2}mv^2 + \left[ mg(y_{\text{equil}}) + \frac{1}{2}k(\Delta y)^2 \right]$$

$$\Rightarrow v = \left( \frac{k}{m}(d)^2 - \frac{k}{m}(\Delta y)^2 - 2g(y_{\text{equil}}) \right)^{1/2}$$

$$= \left( \frac{(175 \text{ N/m})}{(.035 \text{ kg})} \left[ .2^2 - (.00196)^2 \right] - 2(9.8 \text{ m/s}^2)(.198) \right)^{1/2}$$

$$\Rightarrow v = 14 \text{ m/s}$$

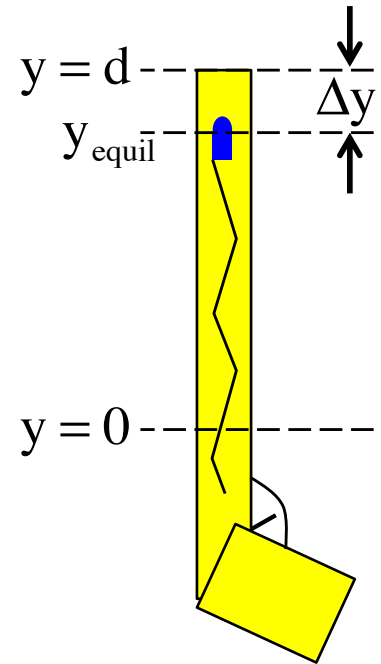

d.) *Add-on #1*: How, generally, would *Question a* change if there had been friction?


There just would have been a “work extraneous” term in the *conservation of energy* expression.

e.) *Add-on #2*: How would the c.of e. expression in *Question a* change if you wanted to know the projectile’s velocity 5 meters above the barrel’s end?

At the end of the time interval, the “h” term in “mgh” would be 5 instead of 10, and there would be a kinetic energy term at the end of the time interval.

### *A little less gentle starter #3:*

Consider the block/pulley/spring set-up shown with the **spring initially uncompressed** and the surface frictional with **coefficients of frictions  $\mu_k$  and  $\mu_s$** . When the system is released, the hanging mass **slowly descends** a distance  $h$  before coming to rest.

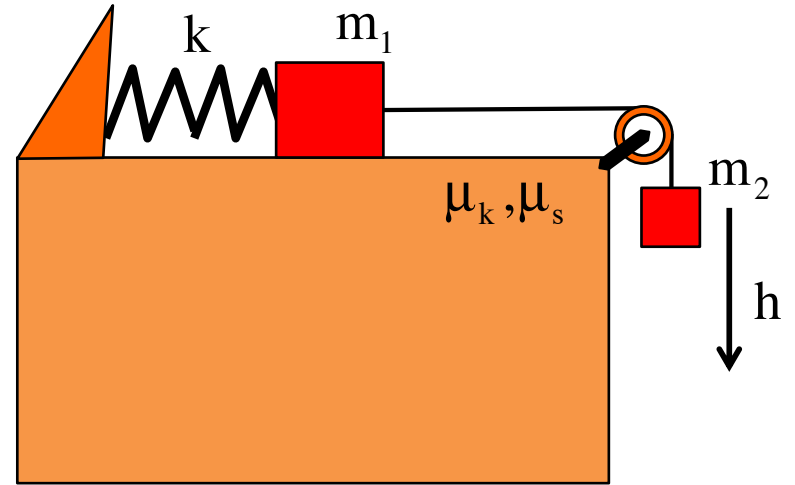


*a.) Once the hanging mass comes to rest, what forces act to keep the system in equilibrium?*

The **spring** is certainly acting, but there is also a **static frictional force** acting. If there was no friction in the system, the spring would allow the mass to drop even farther down than  $h$ . The **static frictional force is not be the maximum static frictional force**. It will, instead, **numerically equal the kinetic frictional force**. That was the **force that was acting as the body was moving, and as the body came to rest**.

a.) Determine the coefficient of kinetic friction.

Using conservation of energy:


$$\begin{aligned} \sum KE_1 + \sum U_1 + \sum W_{\text{ext}} &= \sum KE_2 + \sum U_2 \\ 0 + m_2gh + (\vec{f}_k \cdot \vec{d}) &= 0 + \frac{1}{2}kh^2 \\ 0 + m_2gh + (\mu_k Nd \cos 180^\circ) &= 0 + \frac{1}{2}kh^2 \\ \Rightarrow 2m_2gh + 2(-(\mu_k m_1 g)h) &= kh^2 \\ \Rightarrow \mu_k &= \frac{-kh + 2m_2g}{2m_1g} \end{aligned}$$

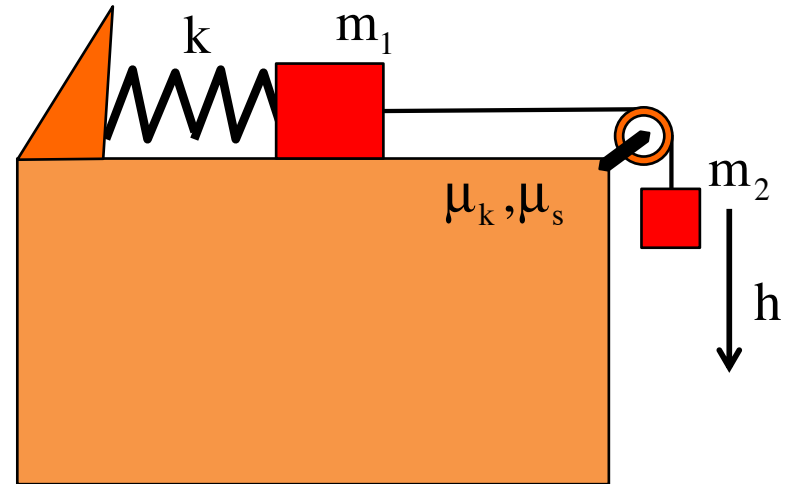


## For a little more sophistication Problem #4

: A pendulum of length  $L = .7$  meters has a mass  $m = .2$  kg at its end. It is observed to have a velocity  $v_o = .3$  m/s when at  $\theta = 30^\circ$  with the vertical. What is the **tension in the line** when it passes through the **bottom of the arc**?

*On the surface*, this looks like a centripetal force problem. When at the bottom, N.S.L. yields:

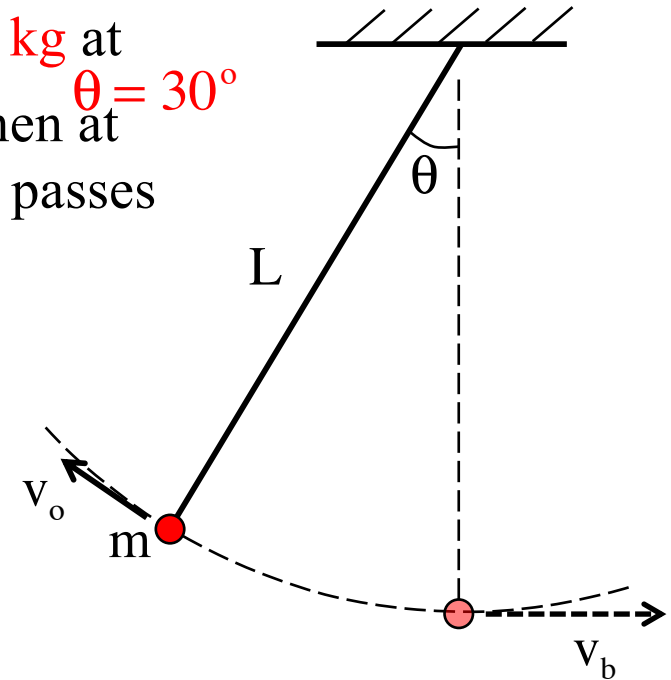


f.b.d. at bottom:

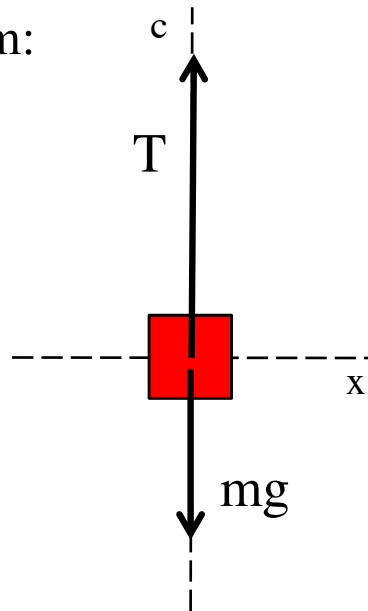

$$\begin{aligned}\sum F_c : \\ T - mg &= ma_c \\ &= m \frac{(v_{\text{bot}})^2}{L} \\ \Rightarrow T &= mg + m \frac{(v_{\text{bot}})^2}{L}\end{aligned}$$

We need an expression for the velocity at the bottom of the arc. Enter the conservation of energy. Taking the bottom of the arc to be the zero potential energy for gravity, noticing that the bob is initially  $L - L \cos \theta$  units above the zero level (how so?—see sketch), and we can write:

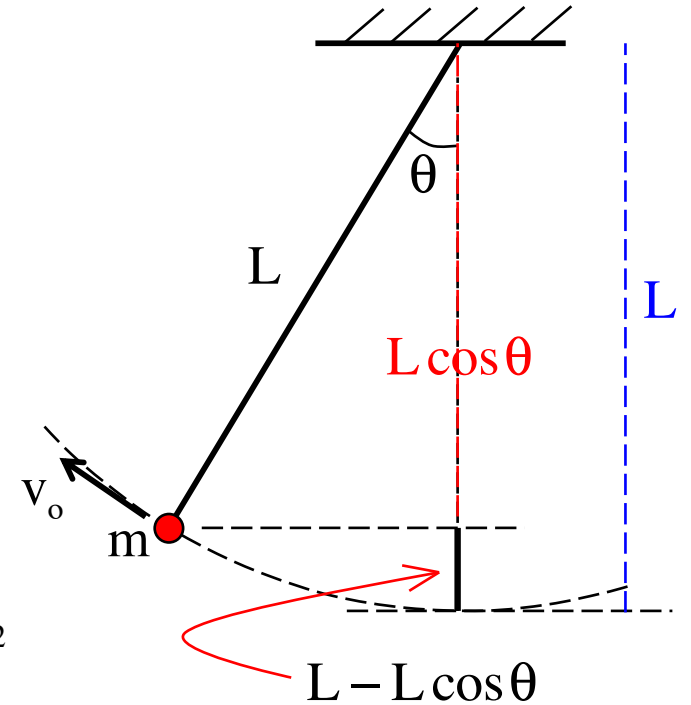

$$\sum KE_1 + \sum U_1 + \sum W_{\text{ext}} = \sum KE_2 + \sum U_2$$

$$\frac{1}{2} m (v_o)^2 + mg(L - L \cos \theta) + 0 = \frac{1}{2} m (v_{\text{bot}})^2 + 0$$

$$\Rightarrow v_{\text{bot}} = \left[ (v_o)^2 + 2g(L - L \cos \theta) \right]^{1/2}$$

$$\Rightarrow v_{\text{bot}} = \left[ (.3 \text{ m/s})^2 + 2(9.8 \text{ m/s}^2)((.7 \text{ m}) - (.7 \text{ m}) \cos 30^\circ) \right]^{1/2}$$

$$= 1.39 \text{ m/s}$$

which means:

$$T = mg + m \frac{(v_{\text{bot}})^2}{L}$$

$$= (.2 \text{ kg})(9.8 \text{ m/s}^2) + (.2 \text{ kg}) \frac{(1.39 \text{ m/s})^2}{(.7 \text{ m})}$$



$$= 2.51 \text{ N}$$



*Loop-the-loop trike:*

*More fun—Problem #5:* A frictionless ramp terminates in a loop of radius  $R$ . A block of mass  $m$  is released from rest and allowed to slide down the ramp and into the loop. How high up from the ground must the block be placed if it is to just barely make it through the top of the loop and out again?

*There are two points of interest here, the start point defined by  $h$  and the top of the arc where the velocity is just big enough to allow the block to skim through and out again. The motion at the top is clearly centripetal, so let's start there. In general:*

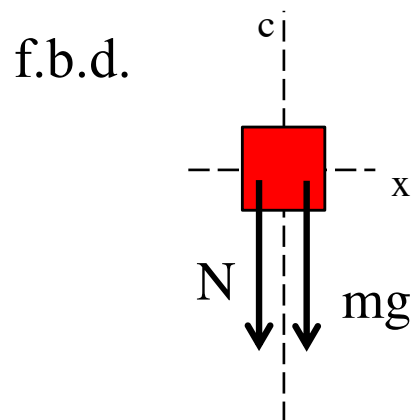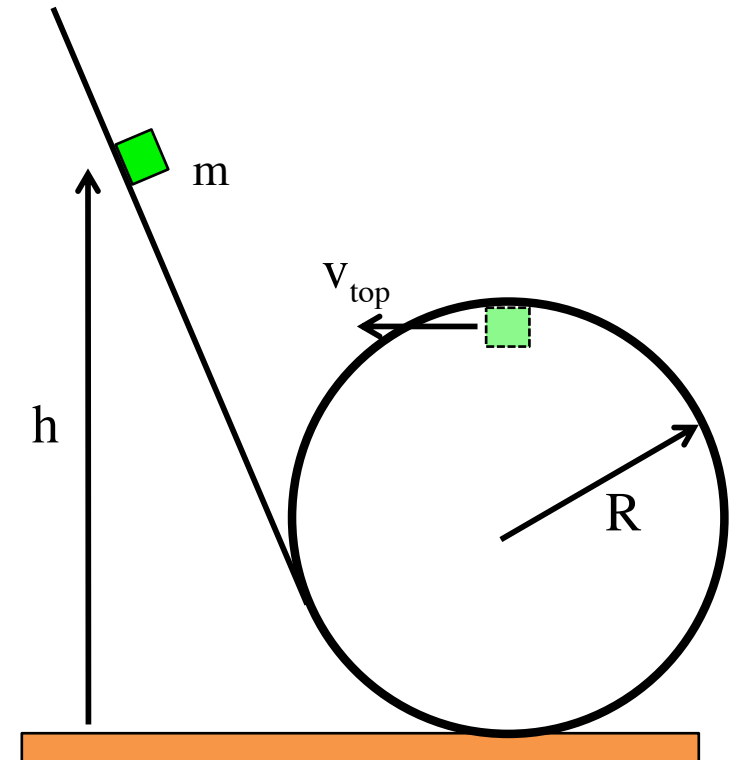


$$\begin{aligned} \sum F_c : \\ -N - mg &= -ma_c \\ &= -m \frac{(v_{\text{top}})^2}{R} \end{aligned}$$

The trickiness here is in noting that at if the block is to just barely skim through the top, the normal force will go to zero, so that:

$$\begin{aligned} \sum F_c : & \quad 0 \\ & \quad -\cancel{N} - mg = -ma_c \\ & \quad \quad \quad = -m \frac{(v_{\text{top}})^2}{R} \\ \Rightarrow & \quad \cancel{m}g = \cancel{m} \frac{(v_{\text{top}})^2}{R} \\ \Rightarrow & \quad (v_{\text{top}})^2 = gR \end{aligned}$$

What does energy have to say about the situation?

$$\begin{aligned} \sum KE_1 + \sum U_1 + \sum W_{\text{ext}} &= \sum KE_2 + \sum U_2 \\ 0 + mgh + 0 &= \frac{1}{2}m(v_{\text{top}})^2 + mg(2R) \\ \Rightarrow \cancel{m}g\cancel{h} &= \frac{1}{2}\cancel{m}(\cancel{g}R) + \cancel{m}g(2R) \\ &\Rightarrow h = \frac{5}{2}R \end{aligned}$$

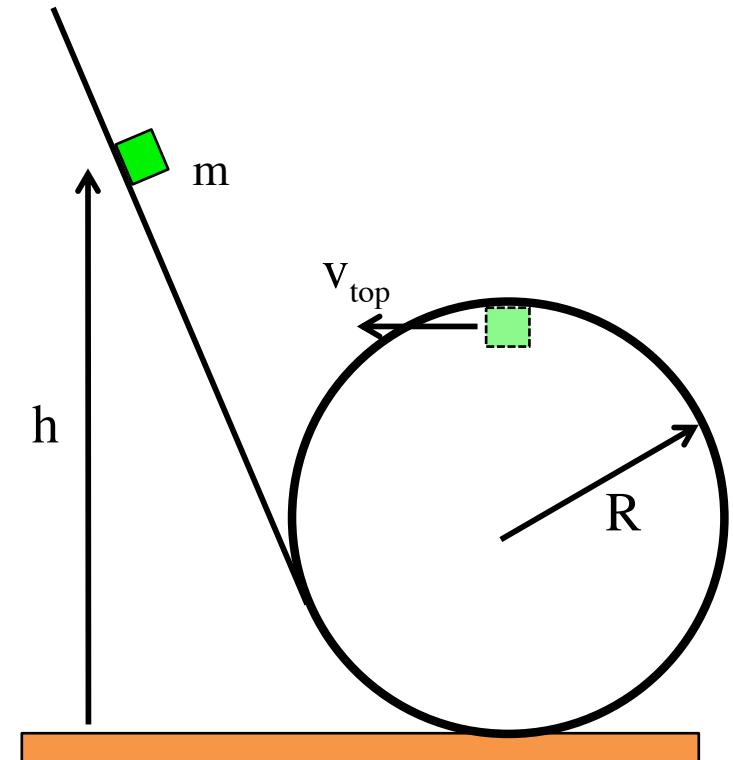


So *how* might we have made this problem more exciting? Well . . .

--we could have **put a spring at the top** (spring constant  $k$ ) and **pushed the block  $x$  units into it before release**. No big deal. All that would have changed would have been the  $\sum U_1$  term yielding:

$$\sum KE_1 + \sum U_1 + \sum W_{\text{ext}} = \sum KE_2 + \sum U_2$$

$$0 + \left( mgh + \frac{1}{2} kx^2 \right) + 0 = \frac{1}{2} m(v_{\text{top}})^2 + mg(2R)$$

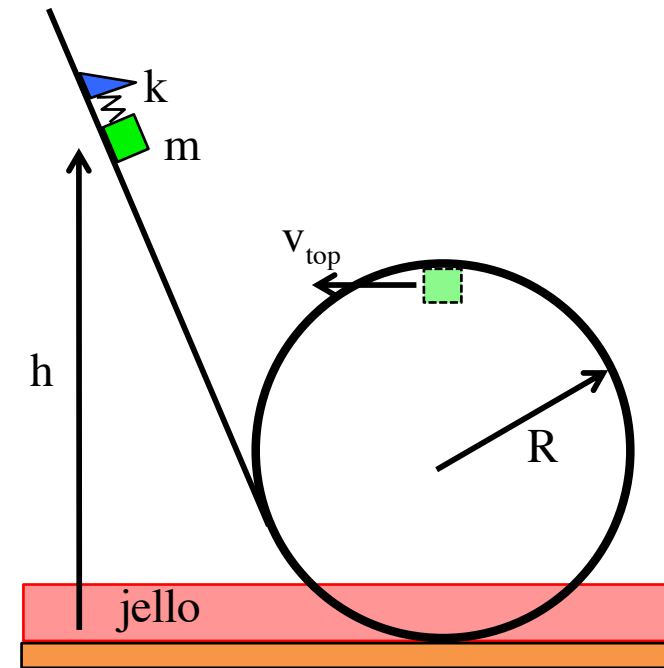


--we could have *additionally* said the block **lost 13 joules of energy** as it passed through a **layer of jello** at the bottom of the ramp before moving on. That would affect the *extraneous work* part of the equation yielding:

$$\sum KE_1 + \sum U_1 + \sum W_{\text{ext}} = \sum KE_2 + \sum U_2$$

$$0 + \left( mgh + \frac{1}{2} kx^2 \right) + (-13 \text{ J}) = \frac{1}{2} m(v_{\text{top}})^2 + mg(2R)$$

## Still more fun with Problem #6:


A small mass  $m$  sits stationary atop a frictionless ice dome of radius  $R$ . A tiny, tiny, tiny gust of wind just slightly nudges the mass off-center, and it begins to slide down the dome. At what angle will it leave the dome?

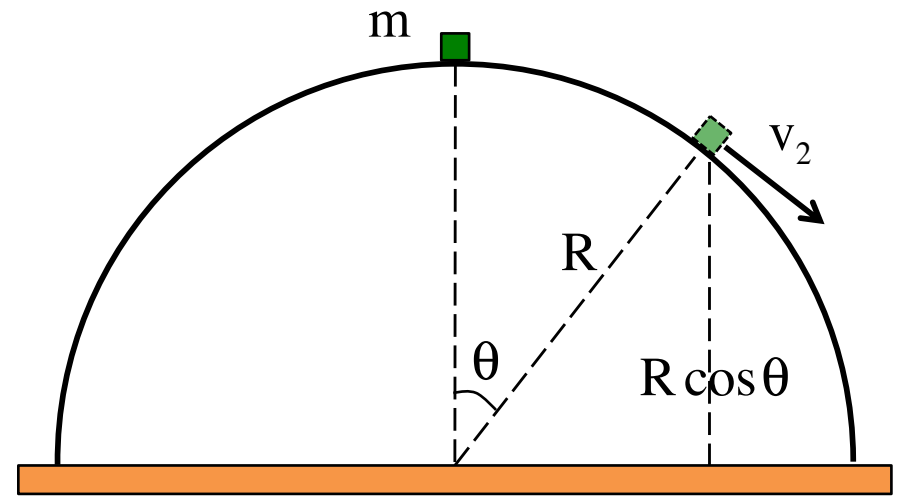

There are, as usual, two points of interest

here. WHENEVER YOU RUN into a problem like this where it isn't at all obvious how to proceed, just start writing down relationships you know are true. In this case, the two that should jump out at you are energy and the fact that the body is moving centripetally at the lift-off point. Utilizing the latter first:


f.b.d. at in general:

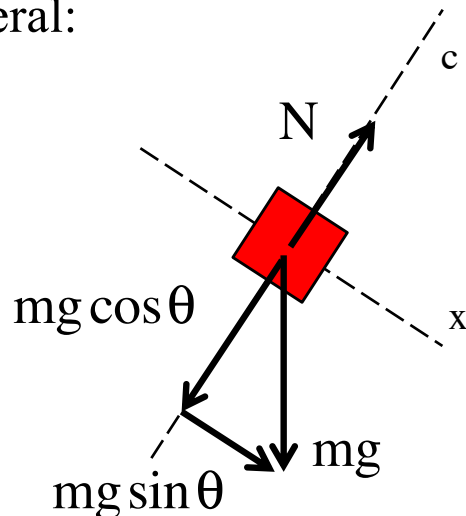

$$\begin{aligned} \sum F_c : \\ N - mg \cos \theta &= -ma_c \\ &= -m \frac{(v)^2}{R} \end{aligned}$$

At *lift-off*, the normal force goes to zero,  
which means:

$$\begin{aligned} \sum F_c &: 0 \\ \cancel{N} - mg \cos \theta &= -ma_c \\ &= -m \frac{(v_2)^2}{R} \\ \Rightarrow \cancel{mg} \cos \theta &= \cancel{m} \frac{(v_2)^2}{R} \\ \Rightarrow (v_2)^2 &= gR \cos \theta \end{aligned}$$

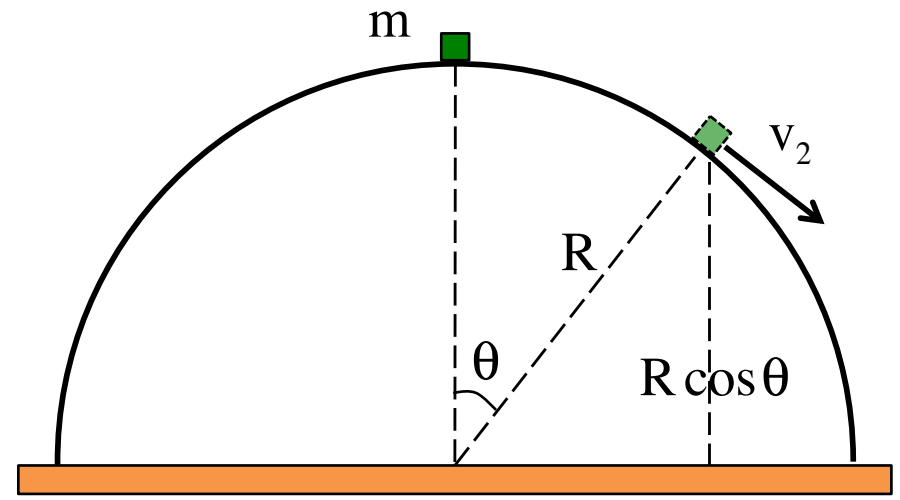

What about energy?

$$\begin{aligned} \sum KE_1 + \sum U_1 + \sum W_{\text{ext}} &= \sum KE_2 + \sum U_2 \\ 0 + (mgR) + 0 &= \frac{1}{2} m (v_2)^2 + mg(R \cos \theta) \\ \Rightarrow \cancel{mgR} &= \frac{1}{2} \cancel{m} (\cancel{Rg} \cos \theta) + \cancel{mg} (R \cos \theta) \\ \Rightarrow 1 &= \frac{1}{2} \cos \theta + \cos \theta = \frac{3}{2} \cos \theta \\ \Rightarrow \theta &= \cos^{-1} \left( \frac{2}{3} \right) = 48.19^\circ \end{aligned}$$

And how might we make *this* more exciting?

We could *extend the ramp upward* as shown. That would *change the initial gravitational potential energy to  $mg(2R)$*  yielding:


$$\sum KE_1 + \sum U_1 + \sum W_{\text{ext}} = \sum KE_2 + \sum U_2$$

$$0 + mg(2R) + 0 = \frac{1}{2}m(v_2)^2 + mg(R \cos \theta)$$

We could *additionally add a spring at the top (not shown)*, which would also *change the initial potential energy* yielding

$$\sum KE_1 + \sum U_1 + \sum W_{\text{ext}} = \sum KE_2 + \sum U_2$$

$$0 + \left( mg(2R) + \frac{1}{2}kx^2 \right) + 0 = \frac{1}{2}m(v_2)^2 + mg(R \cos \theta)$$

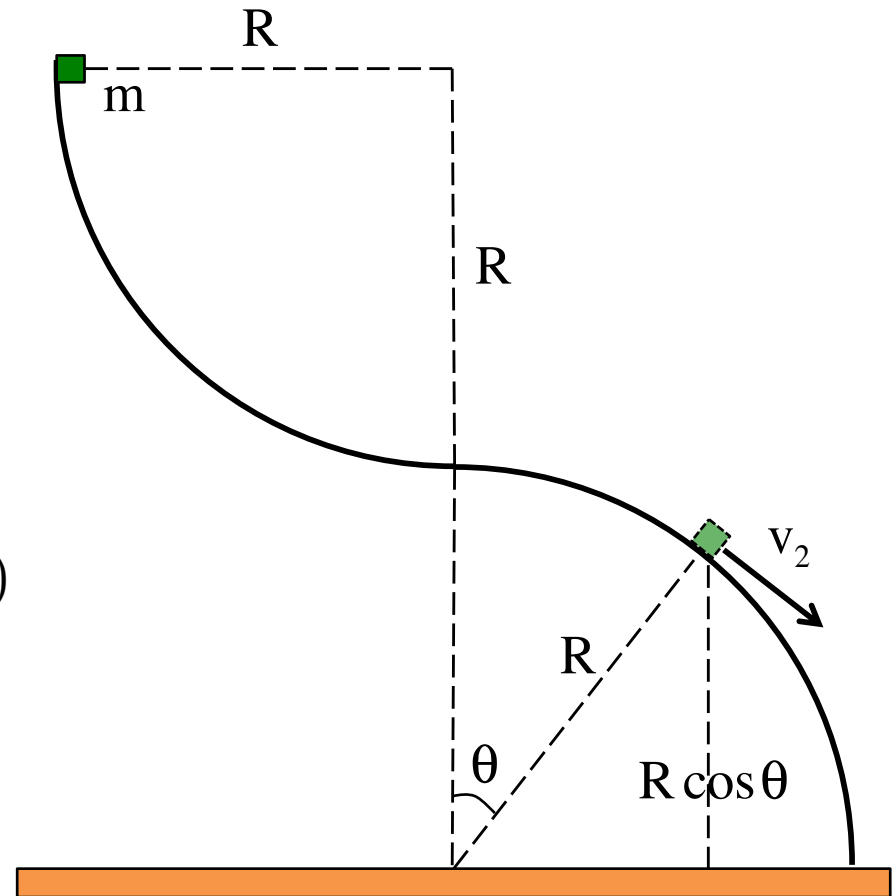




And, of course, we could add to all of that jello that would take out, say 300 joules of energy yielding:


$$\sum KE_1 + \sum U_1 + \sum W_{\text{ext}} = \sum KE_2 + \sum U_2$$

$$0 + \left( mg(2R) + \frac{1}{2}kx^2 \right) + (-300 \text{ J}) = \frac{1}{2}m(v_2)^2 + mg(R \cos \theta)$$

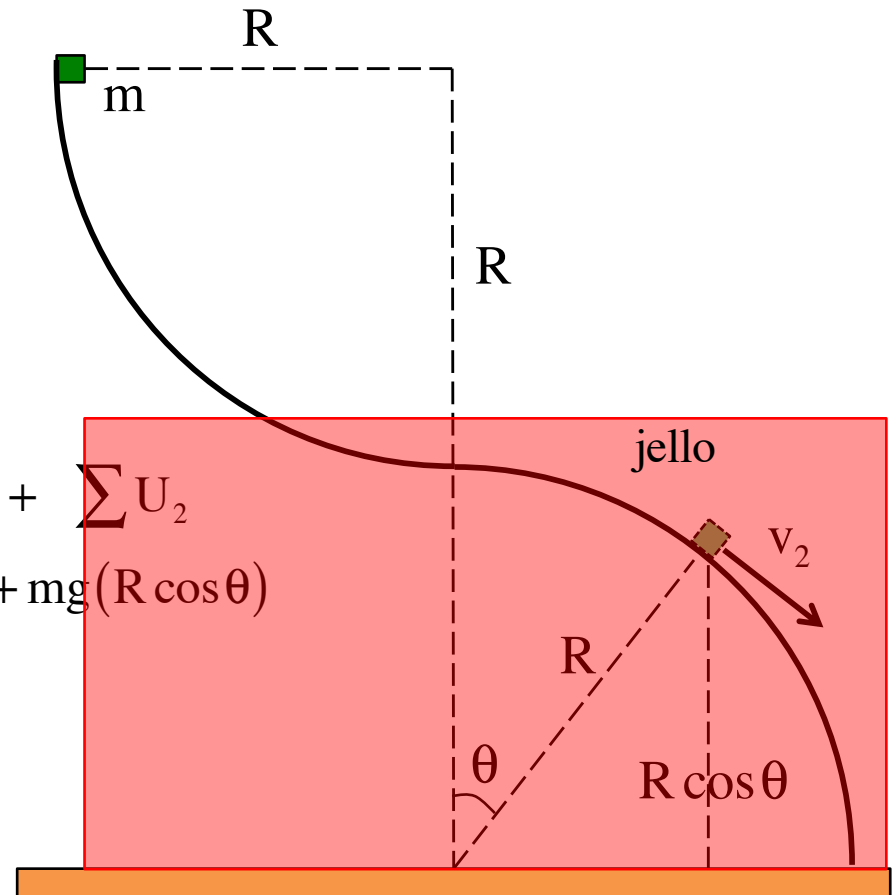

None of these changes would alter the centripetal force part of the problem, but they would alter the energy part. The energy APPROACH wouldn't change, though. Look to see what's happening at the beginning of the interval. Look to see what's happening at the end. Look to see what happened during the interval. It's simple!


*Finally, the problem from hell #1:* A mass  $m = 2 \text{ kg}$  with a jet pack on its back slides down a  $R_c = 12 \text{ m}$  radius curved incline, through a frictional pit of length  $L = 2 \text{ m}$  with  $\mu_k = .3$ , up, over, through and out a loop-the-loop of radius  $R_h = 1.2 \text{ m}$ , through a jello pit that takes 80 joules out of the system whereupon the jetpack fires and produces 500  $\text{N/m}^2$  a  $x = .5 \text{ meter}$  distance before colliding with a spring whose spring constant is  $k = 120 \text{ N/m}$ . If 110 joules of energy are lost due to that collision, by how much does the spring compress during the collision?

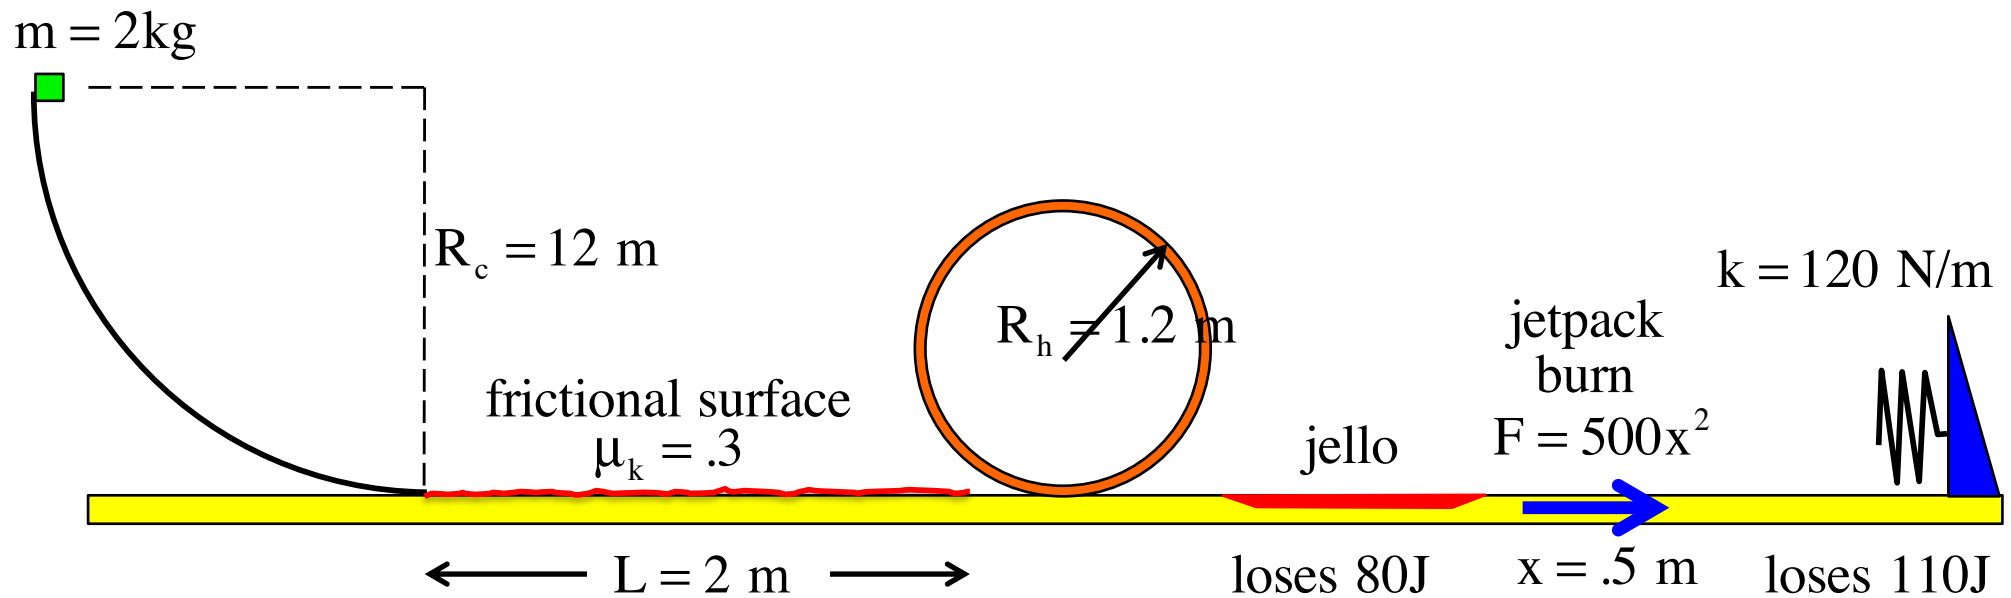


*Note: There is one saving grace* to this problem. In the normal approach to energy considerations, all you do is **write down** the **energy content** of the system **at the beginning of the interval (KE plus U)**, **write down the energy content at the end of the interval**, then **look and write down any work done between the beginning and end that hasn't been taken into account with a potential energy function**.

If it hadn't been stated otherwise (which it was), this problem could have been different in that one possible **answer** to "how much is the spring compressed" **could have been ZERO**. Huh? If the body didn't have enough energy to get passed the loop, it never would have gotten to the spring. You don't have to worry here as you were *told* it got thru, but if you hadn't been you'd have to check to see if it made it.

*So let's* look at energy:

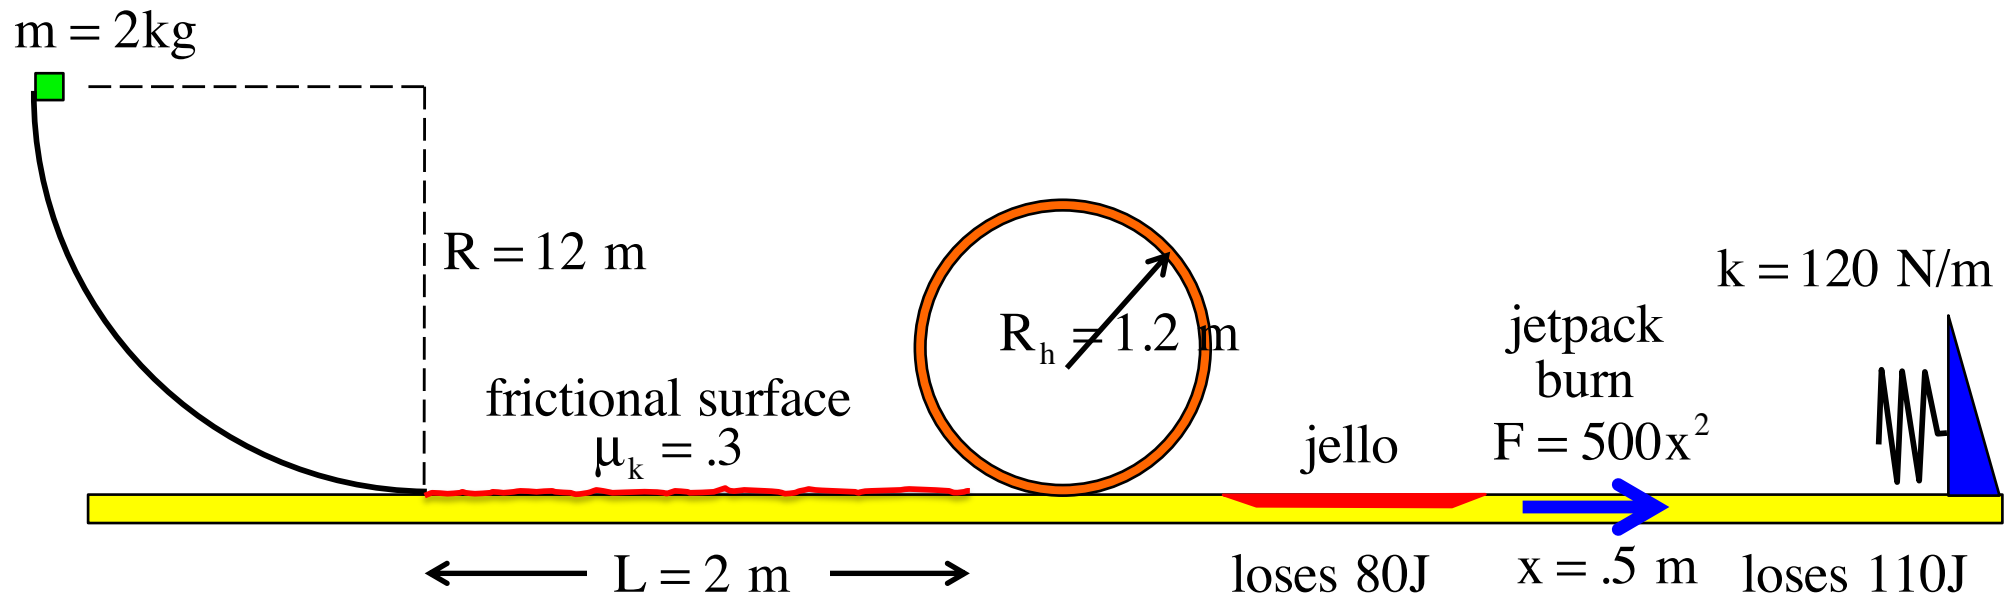

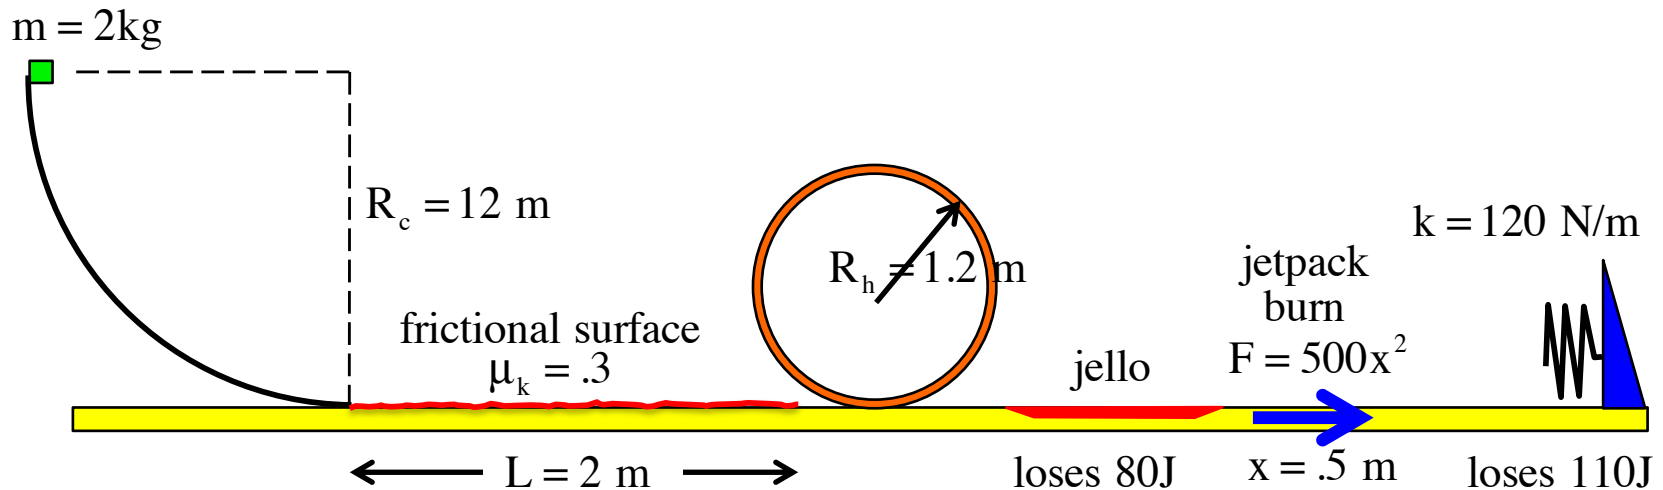

*What's the first thing you will write?*

$$\sum KE_1 + \sum U_1 + \sum W_{\text{ext}} = \sum KE_2 + \sum U_2$$

$$0 + mg(R_c) + \left[ W_{\text{friction}} + W_{\text{jello}} + W_{\text{jetpack}} + W_{\text{collision}} \right] = 0 + \frac{1}{2}kx^2$$


$$0 + mg(R_c) + \left[ (\mu_k N)L \cos 180^\circ + (-80\text{ J}) + \int_{x=0}^{x=.5} (500x^2 \hat{i}) \cdot (dx \hat{i}) + (-110\text{ J}) \right] = 0 + \frac{1}{2}kx^2$$

$$mgR_c - \mu_k (mg)L - (80\text{ J}) + \left( 500 \frac{x^3}{3} \Big|_{x=0}^{x=.5} \right) - (110\text{ J}) = \frac{1}{2}(120\text{ N/m})x^2$$

$$(2\text{ kg})(9.8\text{ m/s}^2)(12\text{ m}) - (.3)(2\text{ kg})(9.8\text{ m/s}^2)(2\text{ m}) - (80\text{ J}) + (20.8\text{ J}) - (110\text{ J}) = \frac{1}{2}(120\text{ N/m})x^2$$

$$\Rightarrow x = .96\text{ m}$$

*Minor Point:* Because the gravitational potential energy function near the surface of the earth is a function of a coordinate axis OF YOUR CHOOSING, it is perfectly permissible to give each body in a system its own axis. A good example of this is the Atwood Machine:

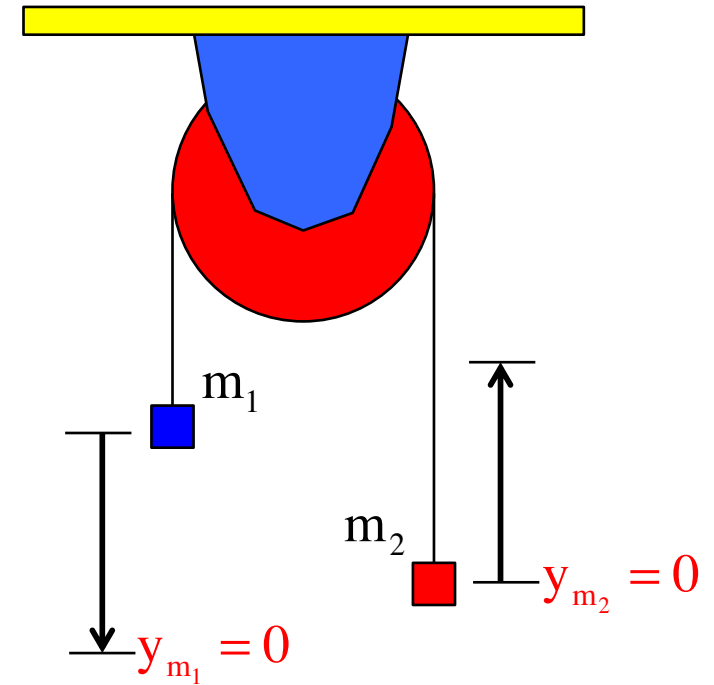

*An Atwood Machine* consists of two masses attached to a string that is hung over a pulley. How does energy lay out as the masses move a distance  $h$ , assuming they start from rest.

*If the left one drops,* the right one rises. Assigning each zero-potential-energy-level (i.e., “ $y = 0$ ”) for each mass at its lowest point in its motion, we have:

$$\begin{aligned} \sum KE_1 + \sum U_1 + \sum W_{\text{ext}} &= \sum KE_2 + \sum U_2 \\ 0 + m_1gh + 0 &= \left[ \frac{1}{2}m_1v^2 + \frac{1}{2}m_2v^2 \right] + m_2gh \end{aligned}$$

# Summary

*Using energy* consideration to problem-solve is essentially a book keeping technique. You focus on the BEGINNING of an interval, looking to see (and writing down) how much *mechanical energy* ( $KE + U$ ) there is at that point in time. You focus on the END of the interval, looking to see (and writing down) how much *mechanical energy* there is *that* point in time. You examine what has happened over the course of the interval, looking to see if there has been any *work done* on the system that has not been taken into account with potential energy functions.

. . . And when you are done, you have a relationship that has kept track of energy *movement* within the system in terms of parameters you might be interested in.

# Power

*Although it's useful* to know how much *work* a *force field* will do on an object traveling through it, it is often considerably more useful to know how much *work per unit time* the field is *capable* of doing (or *actually* does). Called *power*, this *rate at which work is done per unit time* is mathematically defined as:

$$P_{\text{avg}} \equiv \frac{\Delta W}{\Delta t}$$

or if you are talking incremental changes at an instant,  $P_{\text{inst}} \equiv \frac{dW}{dt}$

For a moving body with constant velocity  $v$ , the instantaneous power provided by a force on the body over a displacement  $\vec{s}$  will be:

$$P_{\text{inst}} \equiv \frac{d(\vec{F} \cdot \vec{s})}{dt} = \vec{F} \cdot \frac{d\vec{s}}{dt} = \vec{F} \cdot \vec{v}$$

The units of *power* in the MKS system are *joules per second*, or the *watt*.



*Example: An elevator* with mass 1000 kg carries a load of 800 kg. A frictional force of 4000 N retards the elevator's upward motion

*a.) Determine* the minimum power required to lift the elevator at 3.0 m/s.

The motor has to provide force to overcome the weight of the elevator and occupants (1800 kg times 9.8) plus overcoming the 4000 N of friction. That is:

$$F = (1800 \text{ kg})(9.8 \text{ m/s}^2) + 4000\text{N} \\ = 21640\text{N}$$

$$\Rightarrow P = \vec{F} \cdot \vec{v} \\ = (21640 \text{ N})(3 \text{ m/s}) \\ = 6.49 \times 10^4 \text{ watts}$$

*b.) If the motor* needs a 3:1 safety factor, what should the horsepower factor be on the motor (746 watt/HP)?

$$3P = 3(6.49 \times 10^4 \text{ watts})(\text{HP}/746\text{watt}) \\ = 261 \text{ HP}$$

*An elevator* with mass 1000 kg carries a load of 800 kg. A frictional force of 4000 N retards the elevator's upward motion.

*c.) If the motor* is designed to accelerate the elevator at a rate of 1 m/s/s, what power (as a function of v) must the motor deliver to the system?

Now, along with the force required to overcome the weight of the elevator and occupants (1800 kg times 9.8) plus overcoming the 4000 N of friction, the force must also provide acceleration (ma). That is:

$$\begin{aligned} F &= (1800 \text{ kg})(9.8 \text{ m/s}^2) + 4000\text{N} + ma \\ &= (21640 \text{ N}) + (1800 \text{ kg})(1 \text{ m/s}^2) \\ &= 23440 \text{ N} \end{aligned}$$

$$\begin{aligned} \Rightarrow P &= \vec{F} \cdot \vec{v} \\ &= (2.34 \times 10^4 \text{ N})v \end{aligned}$$